

# **Basin Faucet Installation Manual**

**W-249(ES)**

# Warranty Duration

All components of this faucet system are covered under a lifetime limited warranty, ensuring they are free from defects in material and workmanship for the original purchaser.

# Repair and Replacement

If the product shows defects in material or workmanship under normal use and within the warranty period, we will, at our discretion, either repair the product or provide a replacement at no cost to the original purchaser. Please note that proof of purchase (e.g., an invoice) is required when requesting service. The warranty does not cover damages caused by improper installation, misuse, or modifications.

# Exclusions

We shall not be responsible for the following cases:

- Damage to the product caused by improper installation, misuse, unauthorized repair or replacement, or abuse (including damage during shipment).
- Damage to the product caused by improper dismantling after installation.
- Damage resulting from abnormal water pressure or impurities in water pipes, which is not covered under this warranty.
- Rust on the product due to insufficient care and maintenance, which is not covered under this warranty.
- Damage caused by natural disasters such as fire, flood, earthquake, lightning storms, etc., which is not covered under this warranty.

I hope this helps! If you have any further questions or concerns, please let me know.

# Having Trouble? Contact us.

✉ Email: [info@faucetsupport.com](mailto:info@faucetsupport.com)

☎ Toll Free: 1-888-969-6880

# CEC



**M1371  
SFS-1008**

## **CONTENT**

**Basin Faucet Installation Manual ----- (1-6)**

## **CONTENIDO**

**Manual de instalación del grifo de lavabo ----- (7-12)**

## ◆ Installation and Maintenance Matters


1. Check the accessories list to verify that all parts are complete in this package.
2. Do not disassemble the main body by yourself.
3. Connect inlet pipes to supply valves.
4. Make sure inlet pipes and supply valves have no impurities and are cleaned, with no impurities in the pipeline.
5. After installation, check all joints for leakages.
6. Do not leave the basin faucet exposed to a severely corrosive environment.

### Do's



1. In order to keep the mixer surface bright, please clean the mixer regularly.
2. Rinse the faucet with clean water and wipe it with a soft cotton cloth.
3. Use one of the following cleaners to remove dirt from the surface: a. Mild liquid cleaner. b. Colorless glass cleaner and powder cleaner that do not cause abrasion and can be dissolved completely. c. Polish liquid that does not cause abrasion.

### Don'ts


- a. Avoid using cleaning powder, harsh cleaning chemicals, brushes and coarse cloth to prevent scratching and friction.
- b. Do not use acid cleaners to clean the faucet as they may cause surface corrosion of the faucet. If the faucet is exposed to harmful acid substances, please rinse it immediately with water.



### Tools Needed:




◆ **Hot and Cold Basin Faucet Set**  
**Accessories List**

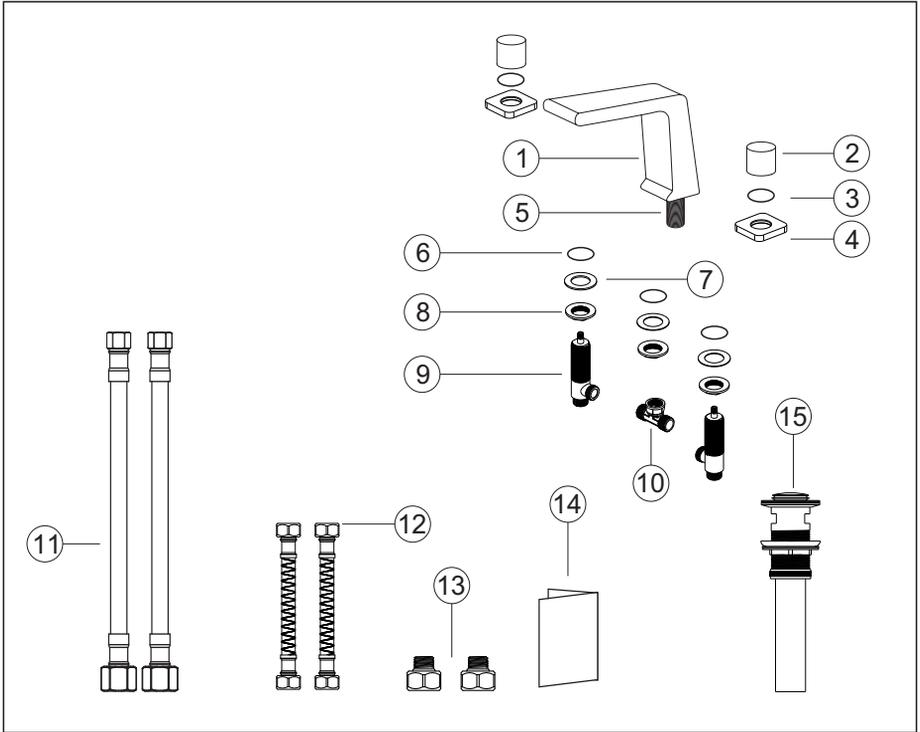

No.	Part name	Qty	No.	Part name	Qty
1	Faucet body	1	9	Control water body	2
2	Handle	2	10	Tee	1
3	O-shaped abrasion-resistant ring	2	11	Hot and cold hoses	2
4	Deck plate	2	12	Spout connector hose	2
5	Brass connector	1	13	Hose Adapter Change G9/16 to G1/2	2
6	O circle	3	14	Instruction manual	1
7	Tee gasket	3	15	Basin drain	1
8	Faucet body nut	3			


## ◆ Basin Faucet Installation

### Step 1

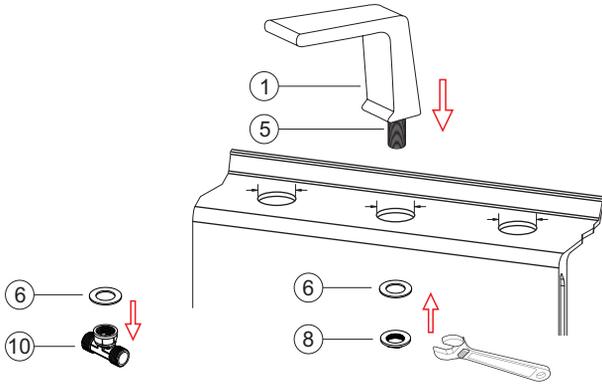

Connect Brass Part ⑤ to Faucet Body ① and insert brass part ⑤ through the basin hole. Install faucet body gasket ⑥ and Mounting Nut ⑧ in sequence, and then tighten the nut with a wrench. Next, insert Tee Gasket ⑥ into Tee ⑩ and connect Tee ⑩ to brass part ⑤.


### Step 2

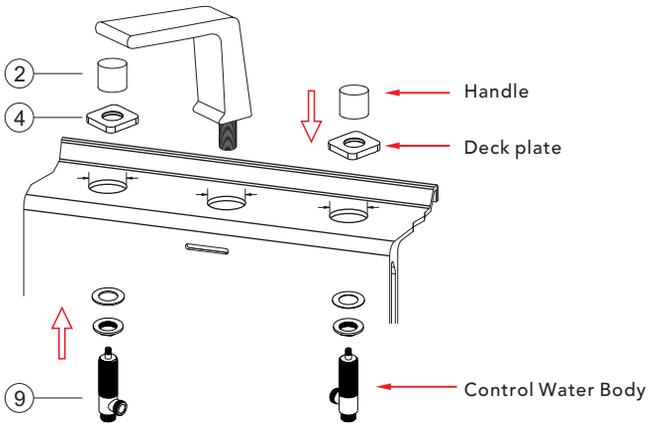

Remove the Decorative Seats ④ and place them on the basin holes. From the underside of the basin holes, connect the Control Water Bodies ⑨ to the Decorative Seats ④ and tighten them. Finally, install the Handles ② and tighten them. (Note: Do not attempt to disassemble the valve yourself, as this may cause leakage.)


## ◆ Basin Faucet Installation

### Step 3

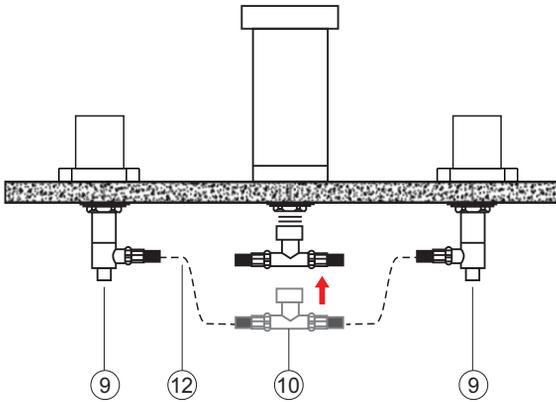

3. Connect one side of the inlet Hoses ⑫ to the Control Water Bodies ⑨ and the other side to Tee ⑩, then tighten them. Note that the red hose is for hot water and the blue hose is for cold water


### Step 4

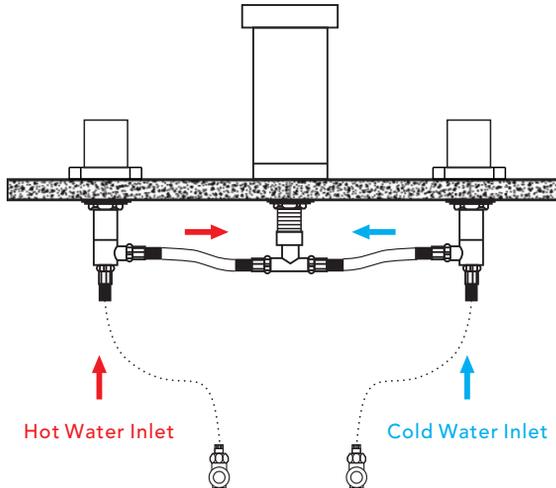

4. Connect two additional inlet hoses to the angle valves and control water bodies. Connect the hose on the left to the hot water and the hose on the right to the cold water.

## ◆ Drain Assembly Installation


### Step1




- Begin disassembling the drain assembly by removing the bottom section first. As illustrated in the image on the left, carefully detach all components step by step.

### Step2

- Insert the upper section of the drain assembly into the basin's drain hole. From underneath the basin, sequentially install the rubber gasket, washer, and fixing brass sleeve onto the threaded tailpiece. Carefully rotate the brass sleeve clockwise until secure, but avoid overtightening to prevent damage to the basin or drain components.
- Finally, rotate and tighten the lower section of the drain assembly downward to secure all components and complete the installation.

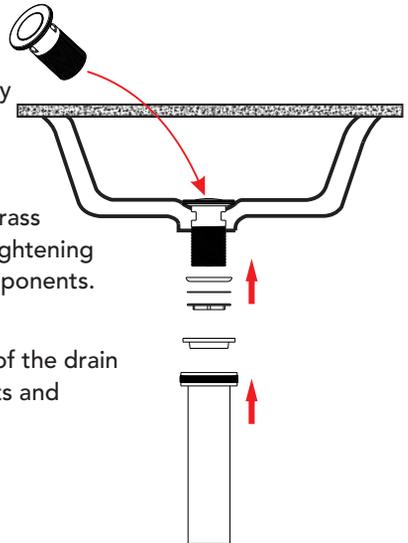

## ◆ Drain Assembly Installation

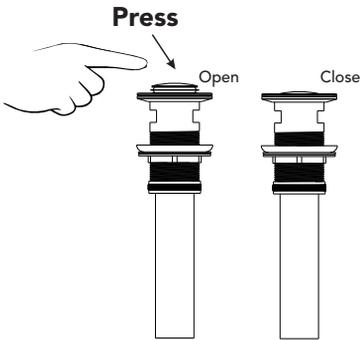


Press the pop-up button located at the top of the drain assembly to open or close the drain outlet.

### ⚠ Notice:

1. **Sealing Test:** Turn on the faucet and allow water to run for several minutes. Carefully inspect the drain assembly and the drainage pipe connections for any signs of leaks. If leaks are detected, adjust the tightness of the gasket and nuts to ensure a proper seal.
2. **Drainage Speed Test:** Check that water flows smoothly through the drain without any blockages or signs of slow drainage. Address any issues promptly to avoid future performance problems.
3. **Selecting the Appropriate Drain:** Different basin designs may require specific sizes and types of drains. Ensure the drain selected is compatible with your basin's size, style, and specifications before installation.

## ◆ Instalación y Cuestiones de Mantenimiento

1. Verifique la lista de accesorios para comprobar que todas las partes están completas en este paquete.
2. No desmonte el cuerpo principal por sí mismo.
3. Conecte las tuberías de entrada a las válvulas de suministro.
4. Asegúrese de que las tuberías de entrada y las válvulas de suministro no tengan impurezas y estén limpias, sin impurezas en la tubería.
5. Después de la instalación, verifique todas las uniones para detectar fugas.
6. No deje el grifo para lavabo expuesto a un entorno altamente corrosivo.





### Hacer

1. En para mantener la superficie de la batidora brillante, limpie el mezclador regularmente.
2. Inse el grifo con agua limpia y límpielo con un suave ropa de algodón.
3. Utilice uno de los siguientes limpiadores para eliminar la suciedad de la superficie: a. Limpiador líquido suave. b. Limpiador de vidrio incoloro y limpiador en polvo que no causen abrasión y que se puedan disolver completamente. c. Líquido pulidor que no cause abrasión.

### No es decir


- A. Valte con polvo de limpieza, productos químicos de limpieza duros, cepillos y tela gruesa para evitar rasgar y fricción.
- B. No use limpiadores de ácidos para limpiar el grifo, ya que pueden causar corrosión superficial del grifo. Si el grifo está expuesto a sustancias ácidas dañinas, enjuague inmediatamente con agua.

### Herramientas Necesarias:



## ◆ Juego de Grifo para Lavabo de Agua Fría y Caliente


### Lista de Accesorios

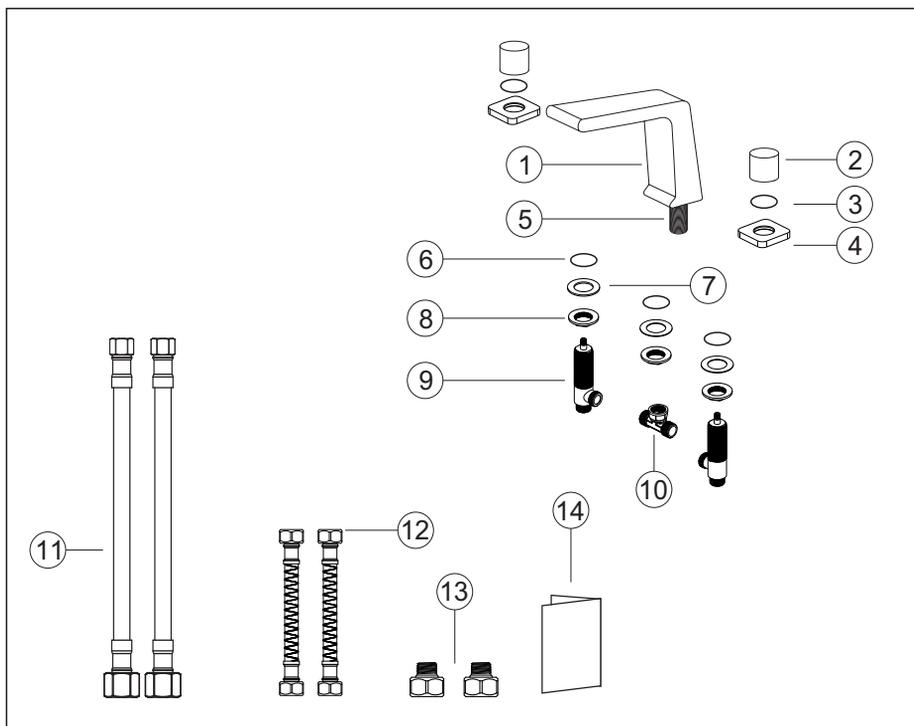

N.º	Nombre de la pieza	Cant	N.º	Nombre de la pieza	Cant
1	Cuerpo del grifo	1	9	Control del cuerpo de agua	2
2	Manija	2	10	Tee	1
3	Anillo resistente a la abrasión en forma de O	2	11	Mangueras de agua caliente y fría	2
4	Placa de cubierta	2	12	Manguera del conector del surtidor	2
5	Conector de latón	1	13	Adaptador de manguera (cambio de G9/16 a G1/2)	2
6	Anillo en O	3	14	Manual de instrucciones	1
7	Junta en T	3	15	Desagüe del lavabo	1
8	Tuerca del cuerpo del grifo	3			


## ◆ Instalación del Grifo para Lavabo

### Paso 1

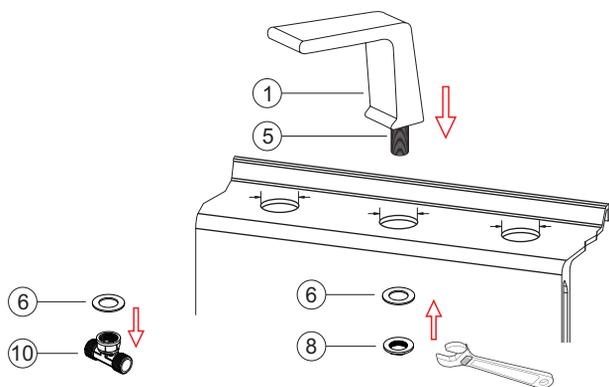

Conecte la parte de latón ⑤ al cuerpo del grifo ① e inserte la parte de latón ⑤ a través del orificio del lavabo. Instale la junta del cuerpo del grifo ⑥ y la tuerca de montaje ⑧ en secuencia, y luego apriete la tuerca con una llave. A continuación, inserte la junta en T ⑥ en la Tee ⑩ y conecte la Tee ⑩ a la parte de latón ⑤.


### Paso 2

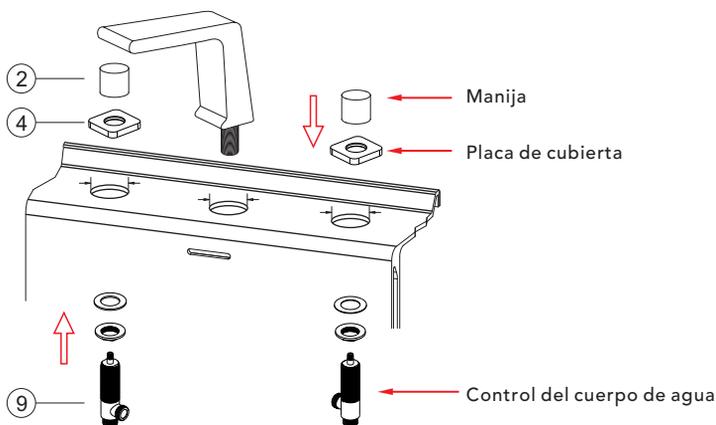

Retire los asientos decorativos ④ y colóquelos en los orificios del lavabo. Desde la parte inferior de los orificios del lavabo, conecte los cuerpos de control de agua ⑨ a los asientos decorativos ④ y apriételos. Finalmente, instale las manijas ② y apriételas. (Nota: No intente desmontar la válvula usted mismo, ya que esto puede causar fugas).


## ◆ Instalación del Grifo para Lavabo

### Paso 3

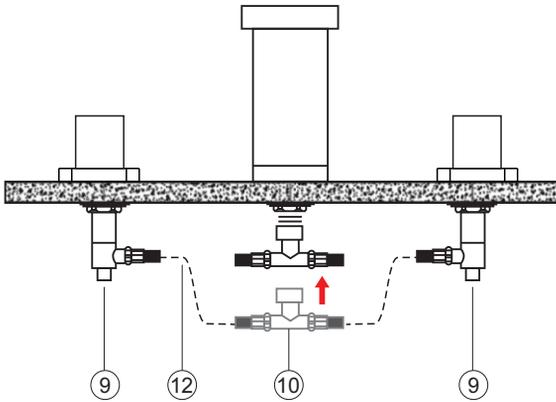

3. Conecte un lado de las mangueras de entrada (12) a los cuerpos de control de agua (9) y el otro lado al conector en T (10), luego ajústelos. Tenga en cuenta que la manguera roja es para agua caliente y la manguera azul es para agua fría.


### Paso 4

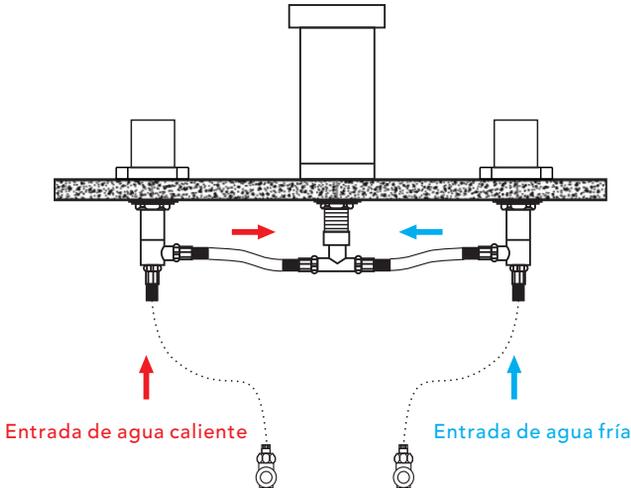

4. Conecte dos mangueras de entrada adicionales a las válvulas de ángulo y a los cuerpos de control de agua. Conecte la manguera de la izquierda al agua caliente y la manguera de la derecha al agua fría.

## ◆ Instalación del Ensamblaje de Drenaje


### Paso 1




- Desmonte el desagüe comenzando por la parte inferior. Como se muestra en la imagen de la izquierda, retire todos los componentes.

### Paso 2

- Inserte la parte superior del desagüe en el orificio de drenaje del lavabo y, desde la parte inferior hacia arriba, coloque secuencialmente la junta de goma, la arandela y la manga de fijación de latón. Gire la manga de latón hacia la derecha hasta que quede ajustada, pero no apriete en exceso para evitar dañar el lavabo o el desagüe.
- Finalmente, continúe girando y apretando hacia abajo la parte inferior de los componentes del desagüe para completar la instalación.

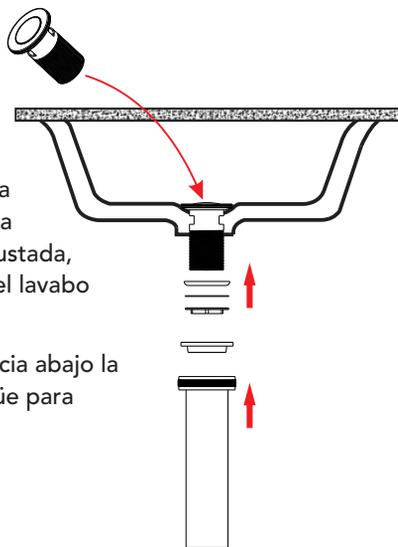

## ◆ Instalación del Ensamblaje de Drenaje

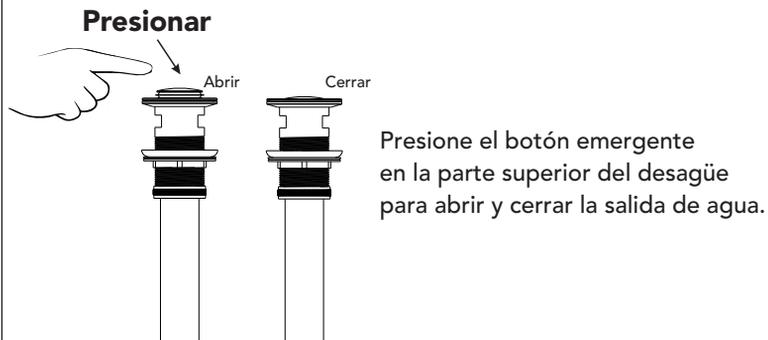

### ⚠ Aviso:

1. Prueba de sellado: Abra el grifo y deje correr el agua durante unos minutos. Observe el desagüe y las conexiones de la tubería de drenaje para detectar posibles fugas. Si encuentra alguna fuga, reajuste la junta y las tuercas hasta lograr un sellado adecuado.
2. Prueba de velocidad de drenaje: Asegúrese de que el agua drene sin problemas, sin bloqueos ni problemas de drenaje lento.
3. Elija el desagüe adecuado: Diferentes lavabos pueden requerir distintos tamaños y tipos de desagües. Asegúrese de que el desagüe que compre sea compatible con su lavabo.